



		230V				24V	
		AC4R DL	AC6R DL	AC8R DL	AC12R DL	AC3 RM DL	AC6 RM DL
Peso Max anta	kg	400	600	800	1200	300	600
Alimentazione motore	V	230V a.c.	230V a.c.	230V a.c.	230V a.c.	24V d.c.	24V d.c.
Potenza	W	250	280	300	350	150	150
Spinta	N	500	700	900	1200	300	500
Lubrificazione	Tipo	Grasso	Grasso	Olio	Olio	Grasso	Grasso
Termoprotezione	°C	140	140	140	140	-	-
Temperatura di esercizio	°C Min/Max	-20 +70	-20 +70	-20 +70	-20 +70	-20 +70	-20 +70
Grado di protezione	IP	44	44	44	44	44	44
Intermittenza lavoro	%	35	35	35	35	80	80
Velocità	mv/min	10	10	8	8	6/12	11
Altezza pignone (h)	mm	99	99	95	95	95	95

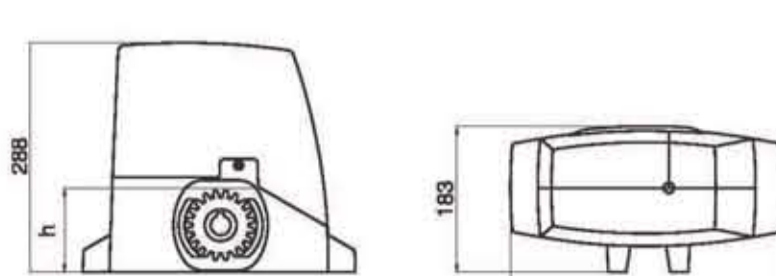

ACER

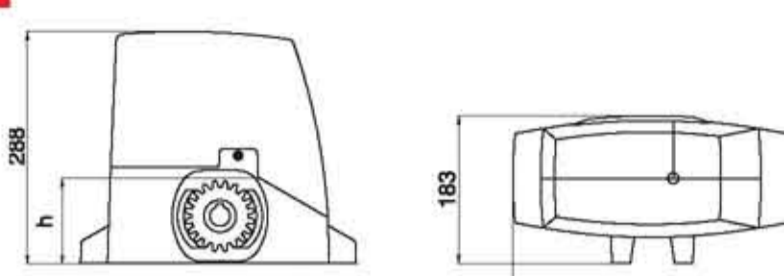

Electromechanical irreversible gear motor for sliding gates. External mounting.

Code	Door	Motor	Description	Pcs / Pallet
AC4R DL	400 Kg	230V a.c.	Version equipped with encoder, opening and closing electromechanical limit switches and central command unit (RG1R DL). Electrical clutch.	12/24
AC4R M DL	400 Kg	230V a.c.	Version equipped with encoder, opening and closing magnetic limit switches and central command unit (RG1R DL). Electrical clutch.	12/24
AC3R M 24 DL	300 Kg	24V d.c.	Version equipped with encoder, opening and closing magnetic limit switches and central command unit (RG1R 24 DL).	12/24
AC6R M 24 DL	600 Kg	24V d.c.	Version equipped with encoder, opening and closing magnetic limit switches and central command unit (RG1R 24 DL).	12/24
AC6R DL	600 Kg	230V a.c.	Version equipped with encoder, opening and closing magnetic limit switches and central command unit (RG1 R DL). Electrical clutch.	12/24
AC6R M DL	600 Kg	230V a.c.	Version equipped with encoder, opening and closing magnetic limit switches and central command unit (RG1R DL). Electrical clutch.	12/24
AC6M	600 Kg	230V a.c.	Version equipped with encoder, opening and closing magnetic limit switches and central command unit (RG1A). Electrical clutch.	12/24
AC8R DL	800 Kg	230V a.c.	Version equipped with encoder, opening and closing electromechanical limit switches and central command unit (RG1R DL). Cast iron gears	12/24
AC8R M DL	800 Kg	230V a.c.	Version equipped with encoder, opening and closing magnetic limit switches and central command unit (RG1R DL). Cast iron gears	12/24
AC12R DL	1200 Kg	230V a.c.	Version equipped with encoder, opening and closing electromechanical limit switches and central command unit (RG1R DL). Electrical clutch. Cast iron gears	12/24
AC12R M DL	1200 Kg	230V a.c.	Version equipped with encoder, opening and closing magnetic limit switches and central command unit (RG1R DL). Electrical clutch. Cast iron gears	12/24



SETUP ACER DL



Code	Door	Gear Motors	Limit switches	Setup / Pallet
SETUP AC3R M 24 DL	300 Kg	AC3 RM 24 DL	Magnetic	24



Code	Door	Gear Motors	Limit switches	Setup / Pallet
SETUP AC3R M 24 DL S	300 Kg	AC3 RM 24 DL	Magnetic	24



Code	Door	Gear Motors	Limit switches	Setup / Pallet
SETUP AC3R M 24 DL EASY	300 Kg	AC3 RM 24 DL	Magnetic	24

SETUP ACER DL 230V




SETUP AC4R DL	400 Kg	AC4R	Electromechanic
SETUP AC6R DL	600 Kg	AC6R	Electromechanic
SETUP AC8R DL	800 Kg	AC8R	Electromechanic
SETUP AC12R DL	1200 Kg	AC12R	Electromechanic
SETUP AC4RM DL	400 Kg	AC4RM	Magnetic
SETUP AC6RM DL	600 Kg	AC6RM	Magnetic
SETUP AC8RM DL	800 Kg	AC8RM	Magnetic
SETUP AC12RM DL	1200 Kg	AC12RM	Magnetic

SETUP ACER DL 24V



SETUP AC3R M 24 DL	300 Kg	AC3 24 RM	Magnetic
--------------------	--------	-----------	----------

		230V 50Hz				24V	
		AC4R DL	AC6R DL	AC8R DL	AC12R DL	AC3RM DL	AC6RM DL
Max weight wing	kg	400	600	800	1200	300	600
Motor supply	V	230V a.c.	230V a.c.	230V a.c.	230V a.c.	24V d.c.	24V d.c.
Power	W	250	280	300	350	150	150
Force	N	500	700	900	1200	300	500
Lubrification	Tipo	Grasso	Grasso	Olio	Olio	Grasso	Grasso
Temperatura di esercizio	°C	140	140	140	140	-20 +70	-20 +70
Working temperature	°C Min/Max	-20 +70	-20 +70	-20 +70	-20 +70	-20 +70	-20 +70
Protection level	IP	44	44	44	44	44	44
Speed	cm/min	10	10	8	8	6/12	11
Intermittence work cycle	%	35	35	35	35	80	80
Height gears (h)	mm	99	99	95	95	95	95

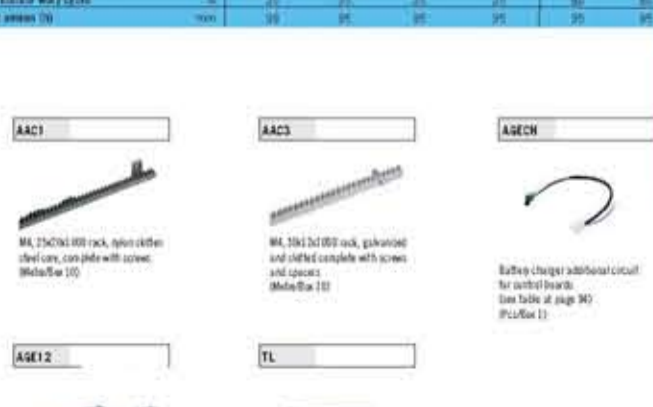

SETUP ACER DL



Code	Door	Gear Motors	Limit switches	Setup / Pallet
SETUP AC4R DL	400 Kg	AC4R DL	Electromechanic	24
SETUP AC6R DL	600 Kg	AC6R DL	Electromechanic	24
SETUP AC8R DL	800 Kg	AC8R DL	Electromechanic	24
SETUP AC12R DL	1200 Kg	AC12R DL	Electromechanic	24
SETUP AC4RM DL	400 Kg	AC4RM DL	Magnetic	24
SETUP AC6RM DL	600 Kg	AC6RM DL	Magnetic	24
SETUP AC8RM DL	800 Kg	AC8RM DL	Magnetic	24
SETUP AC12RM DL	1200 Kg	AC12RM DL	Magnetic	24