




		230V							
		TENAX 120	TENAX 120 F	TENAX 160	TENAX 160F	TENAX 210	TENAX 210F	TENAX 420	TENAX 420F
Coppia	Nm	120	110	160	150	210	190	420	380
R.P.M.		10	10	10	10	8	8	8	8
N° giri finecorsa		5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6
Potenza	W	460	480	630	630	630	630	1260	1260
Corrente assorbita	A	2000	2000	1800	2000	2000	1500	1800	1800
Peso	Kg	7	8	8	9	9	10	16	17
Sollevamento	Kg	120	120	160	160	180	180	360	360
Albero Serranda	mm	60	60	60	60	76	76	76	76
Corona	mm	200	200	200	200	240	240	240	240
Tempo prima termico	min	4	4	4	4	4	4	4	4

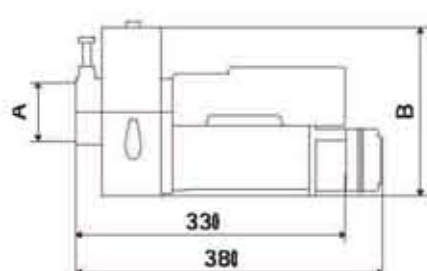

	A (mm)	B (mm)
TENAX 120 TENAX 120F TENAX 160 TENAX 160F	60	200
TENAX 210 TENAX 210F TENAX 420 TENAX 420F	76	240

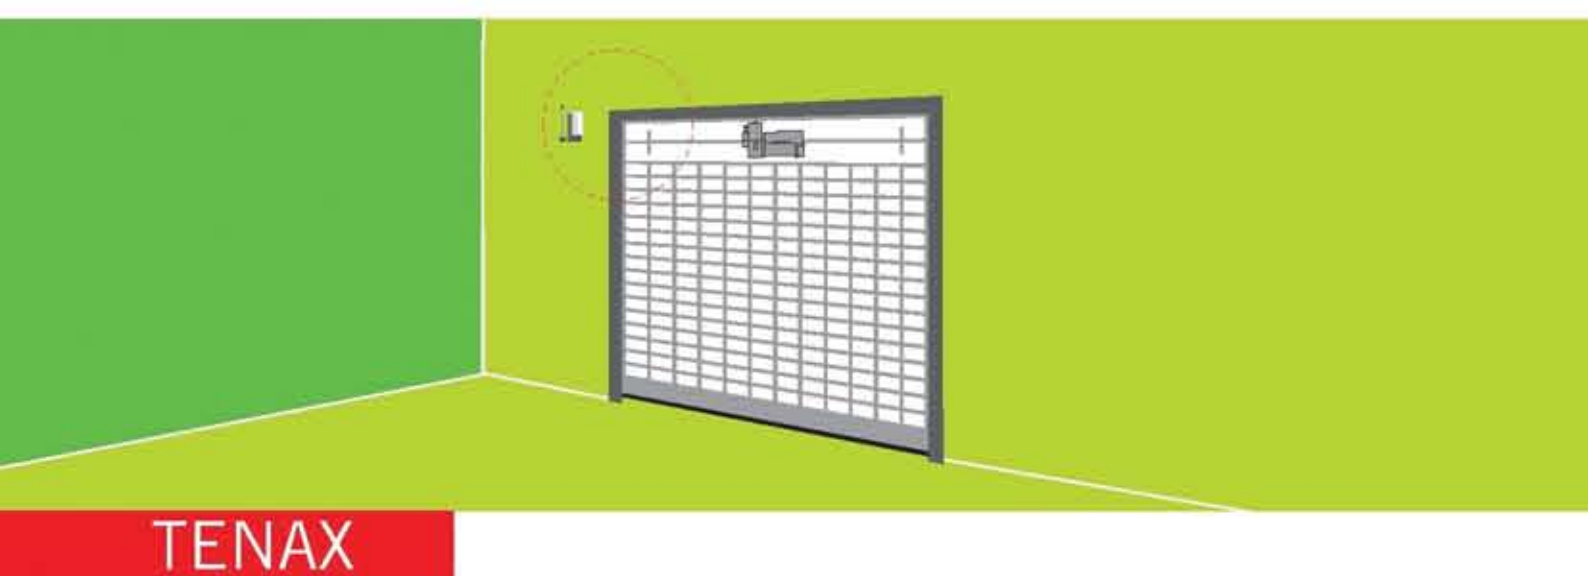

TENAX

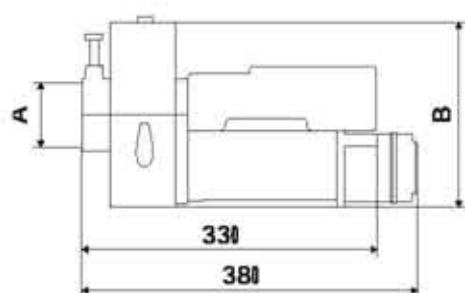

	A (mm)	B (mm)
TENAX 120 TENAX 120F TENAX 160 TENAX 160F	60	200
TENAX 210 TENAX 210F TENAX 420 TENAX 420F	76	240

Central gear motor for rolling shutters.

Code	Pair (Nm)	Motor	Description	Pcs / Pallet
TENAX 120	120	230V a.c.	Reversible gear motor without a brake function. Raising force 120 kg.	21
TENAX 120 F	110	230V a.c.	Irreversible gear motor with a brake function. Raising force 120 kg.	21
TENAX 160	160	230V a.c.	Reversible gear motor without a brake function. Raising force 160 kg.	21
TENAX 160 F	150	230V a.c.	Irreversible gear motor with a brake function. Raising force 160 kg.	21
TENAX 210	210	230V a.c.	Reversible gear motor without a brake function. Raising force 180 kg.	21
TENAX 210 F	190	230V a.c.	Irreversible gear motor with a brake function. Raising force 180 kg..	21
TENAX 420	420	230V a.c.	Reversible gear motor without a brake function. Raising force 360 kg.	21
TENAX 420 F	380	230V a.c.	Irreversible gear motor with a brake function. Raising force 360 kg.	21

	TENAX 120	TENAX 120F	TENAX 160	TENAX 160F	TENAX 210	TENAX 210F	TENAX 420	TENAX 420F
Pair	Nm	120	110	160	150	210	190	380
R.P.M.		10	10	10	10	8	8	8
N° giri finecorsa		5-6	5-6	5-6	5-6	5-6	5-6	5-6
Before thermal time	min	4	4	4	4	4	4	4
Absorbed power	W	460	480	630	630	630	1260	1260
Absorbed intensity	A	2.2	2.2	2.7	2.7	2.7	5.4	5.4
Weight	Kg	7	8	8	9	9	10	17
Raising	Kg	120	120	160	160	180	360	360
Roller Shutter	mm	60	60	60	60	76	76	76
Gear	mm	200	200	200	200	240	240	240

ASECAR XL



External unblocking device with metallic cable. (Pcs/Box 1)

DOS



Key selector to release mechanically the load. (Pcs/Box 1)

TEN 33



Tube Adapter of Ø 33 millimeter. (Pcs/Box 1)

TEN 42



Tube Adapter of Ø 42 millimeter. (Pcs/Box 1)

TEN 48



Tube Adapter of Ø 48 millimeter. (Pcs/Box 1)

GE UNI R



Control unit. (Pcs/Box 1)

GE UNI EASY



Control Unit. (Pcs/Box 1)

TL



Warning sign.